




DETAIL 1



DETAIL 2

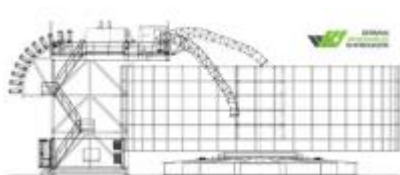

DETAIL 3

TECHNICAL PARTICULARS CABLE CAROUSEL:

- Max. load capacity offshore: 4,000 metric tons
- Max. load capacity onshore (cable storage): 5,200 metric tons
- Outside extreme diameter of carousel: 23.30 m
- Outer diameter of «basket»: 23.00 m
- Inner diameter of «basket»: 4.00 m
- Height of «basket»: 6.00 m
- Volume of «basket»: 2,416 m³
- Weight of carousel: 380 metric tons
-





5,200 TONS CABLE CAROUSEL PACKAGE



GLOBAL
RENEWABLES
SHIPBROKERS

- Centre of gravity above base: 2.30 m
- Carousel speed, stepless: 0 to 1.0 RPM
- Nos. of frequency controlled pinion drives: 4 pcs., each 75/84 kW
- Power supply (Dual voltage): 3 ph., 400/440 V, 50/60 Hz
- Certified by: DNV GL
- Built year: 2016

TECHNICAL PARTICULARS LOADING TOWER:

- Weight of loading tower complete: 60 metric tons
- Max. product diameter: 500 mm
- Max. product weight: 300 kg/m
- MBR of product: 4.20 m

Cable Loading Arm:

- Power requirement: 11 kW, 3 ph., 400/440 V, 50/60 Hz

10 Te Cable Tensioner:

- Max. tension: 10 metric tons
- Max. opening: 500 mm
- Max. speed: 1,000 m/h
- Power requirement: 32 kW, 3 ph., 400/440 V, 50/60 Hz
- Built year: 2016

